

2490

ROFU 2490 Rim Mount Strike is a fully surface mount strike and designed with strength and durability for rim exit devices with a 1/2" latch throw.


No cutting on the frame is required and it is field selectable for fail-safe and fail-secure. The strike operates at both 12 and 24 VDC and is designed for indoor use only.



STANDARD FEATURES

- Dual voltage 12/24 VDC field selectable
- Field reversible: fail-safe or fail-secure
- No frame cutting required, surface mounted
- Non-handed fully reversible
- Horizontal adjustment
- Static strength 1500 LB (680 KG)
- Dynamic strength 70 ft-lbs (9.68 m-kgs)
- Endurance rating 250,000 cycles, 1,000 000 factory tested


DIMENSIONS

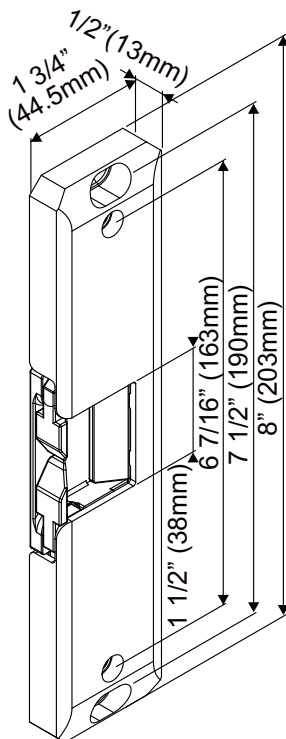

SPECIFICATION

VOLTAGE	12/24 VDC
CURRENT DRAW	540 mA/12 VDC; 270 mA/24 VDC
MODE	Field reversible fail-safe or fail-secure
STATIC STRENGTH	1500 LB (680 KG)
DYNAMIC STRENGTH	70 ft-lbs (9.68 m-kgs)
HOUSING THICKNESS	1/2" (13 mm)
OPERATING TEMP.	14°F to 120°F (-10°C~+49°C)
HUMIDITY	0~85% non-condensing
DIMENSION	8" x 1 3/4" x 1/2"

WIRING DIAGRAMS

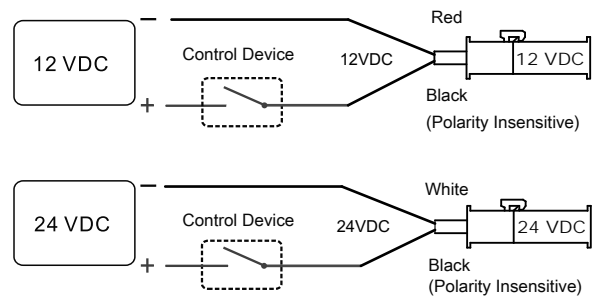

CHANGING FAIL-SAFE/FAIL-SECURE

Remove screw #1, loosen, slide and tighten screw #2. Tighten screw #1 to the proper position Fail-secure or Fail-safe.

